

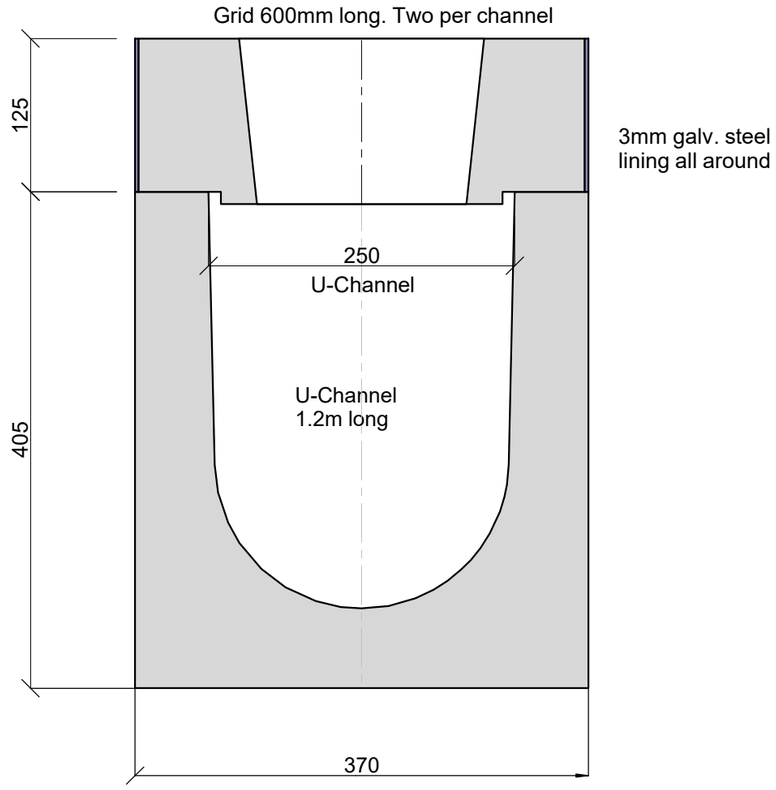


CROSS SECTION
CHANNEL AND GRID


Reinforcing steel not shown

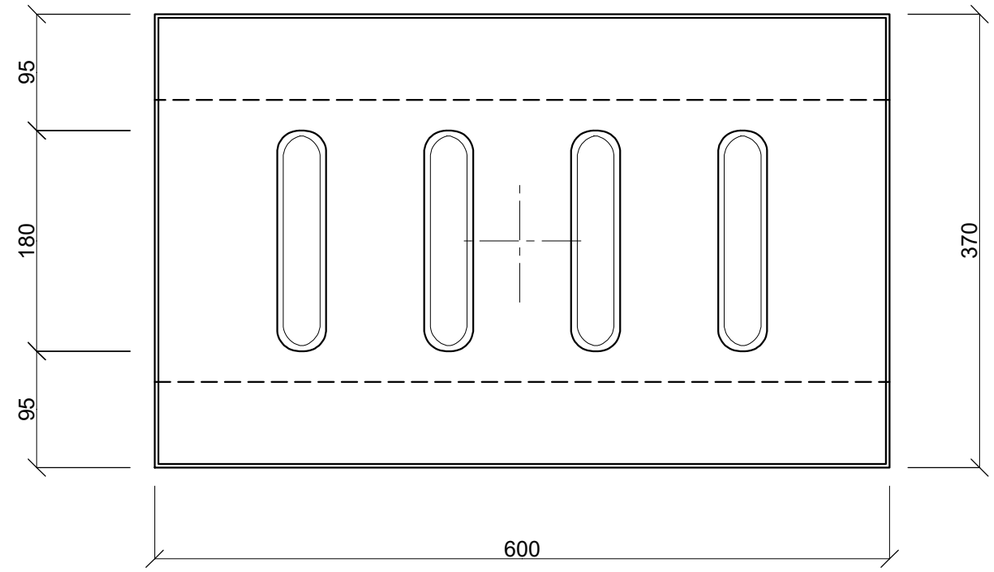

TOP VIEW

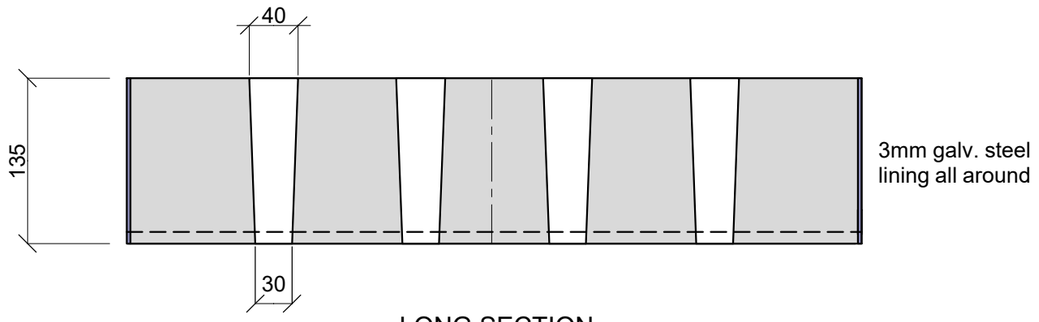

LONG SECTION

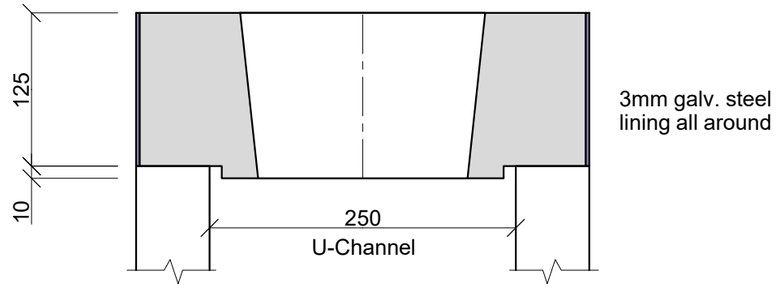

Reinforcing steel not shown

CROSS SECTION

SPECIFICATION

Design Load: Class C250 = 250kN; Class D400 = 400kN
Concrete 35MPa
Reinforcing welded at cross points and to lining.
All steel including reinforcing is hot dipped galvanised.

Quantity to Cast:	180 grids
Concete Mix	57
Mass kg ±	.../grid
Reinforcing: To be checked by Eng	yes

ROBUST GRID COVERS FOR U-CHANNELS CLASS C250
Size 600 x 370 x 135mm

Vanstone